


Stainless steel industrial traction gas springs

Material 1.4301/1.4305, AISI 304/303 (V2A)

Material 1.4404/1.4571, AISI 316L/316Ti (V4A)

In addition to the comprehensive range of industrial gas springs with valve, ACE also offers a wide range of industrial traction gas springs made of stainless steel with body diameters from 15 mm to 40 mm. This high-quality version is also available on request in all stroke lengths and possible extension forces. The comprehensive range of fitting parts ensures easy installation and makes the gas traction springs universal in use. Stainless steel traction gas springs are used everywhere that raising and lowering is required. Due to their special properties, **non-rusting and low magnetism**, they are the preferred equipment for medical and clean-room technology, the foodstuffs industry, electronics and shipbuilding sector.

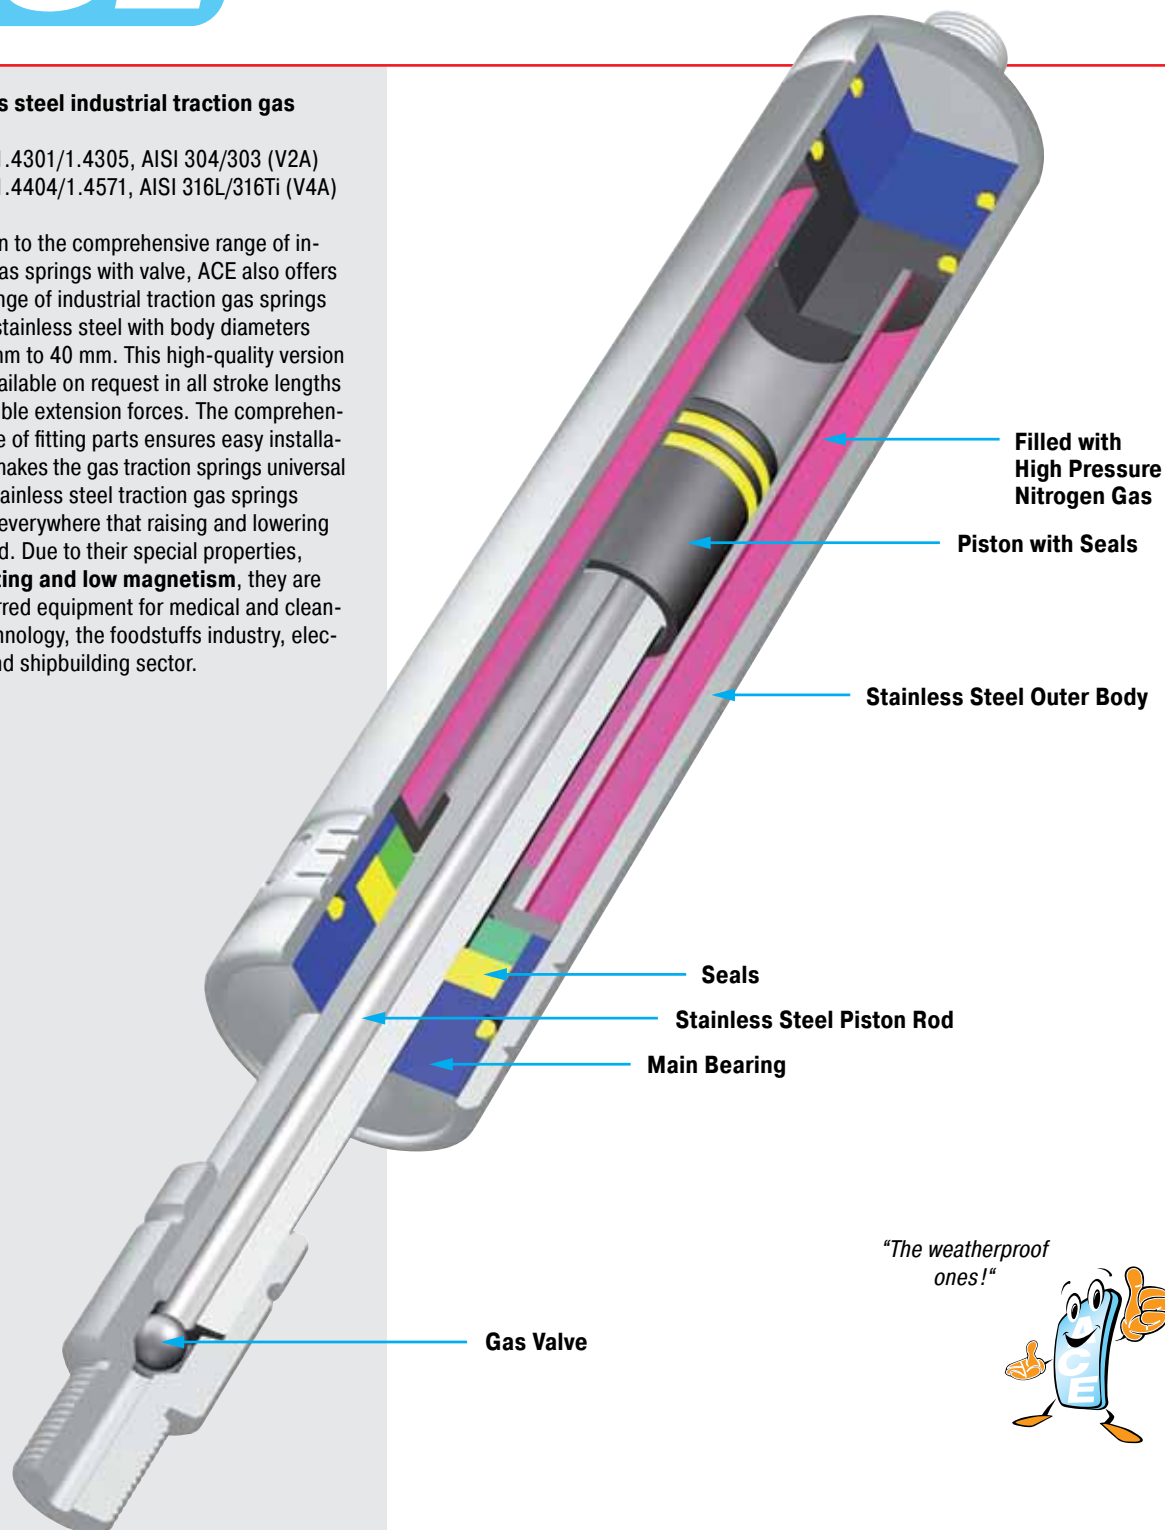

"The weatherproof ones!"



Operating fluid: Nitrogen gas

Material: Piston rod, body and end fittings: Material 1.4301/1.4305, AISI 304/303 (V2A) and material 1.4404/1.4571, AISI 316L/316Ti (V4A).

Mounting: In any position

Operating temperature range:
-20 °C to 80 °C

On request: Special force curves, special lengths, alternative seals, wiper.



Traction (Pull) Forces 50 N to 150 N
(when Piston Rod Extended up to 185 N)

End Fitting

Standard Dimensions

End Fitting

B3,5

Stud Thread B3,5

A3,5-V4A

Eye
A3,5-V4A
max. force 370 N

C3,5-V4A

Angle Ball Joint
C3,5-V4A
max. force 370 N

D3,5-V4A

Clevis Fork
D3,5-V4A
max. force 370 N

G3,5-V4A

Ball Socket
G3,5-V4A
max. force 370 N

Adjuster Knob
DE-GAS-3,5
See page 149.

Dimensions


Type	Stroke mm	L retracted
GZ-15-20-V4A	20	87
GZ-15-40-V4A	40	107
GZ-15-50-V4A	50	117
GZ-15-60-V4A	60	127
GZ-15-80-V4A	80	147
GZ-15-100-V4A	100	167
GZ-15-120-V4A	120	187
GZ-15-150-V4A	150	217

Ordering Example

Type (Pull Type) GZ-15-150-AC-150-V4A
 Body Ø (15 mm) _____
 Stroke (150 mm) _____
 Piston Rod End Fitting A3,5-V4A _____
 Body End Fitting C3,5-V4A _____
 Traction Force F_1 150 N _____
 Indicated by K.-No. on delivery _____

The end fittings are interchangeable and must be positively secured by the customer to prevent unscrewing (i.e. Loctite).
For mounting accessories see page 188.

GZ-15-V4A

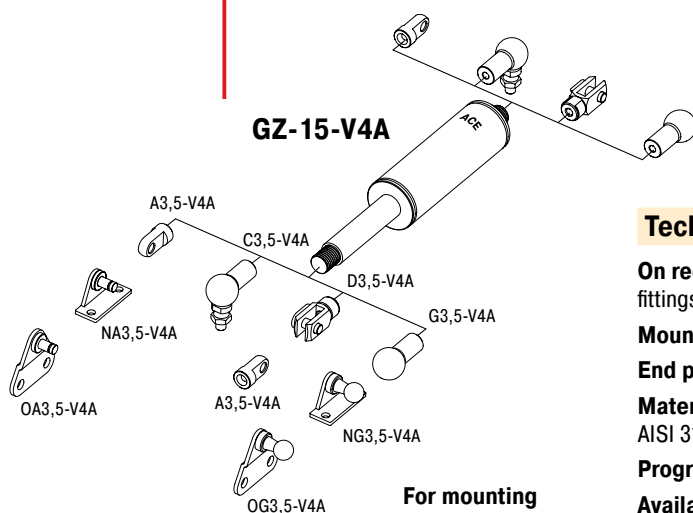

For mounting
accessories
see page 188.

Technical Data

On request: Special force curves, special lengths, alternative end fittings, rod shroud.

Mounting: In any position. Install mechanical stop in extended position.

End position damping length: Without damping

Material: Piston rod, body and end fittings: Material 1.4571/1.4404, AISI 316L/316Ti (V4A).

Progression: Approx. 23 %, F_2 max. 185 N

Available traction force range F_1 at 20 °C: 50 N to 150 N

Note: Lifetime approx. 2000 m


Traction (Pull) Forces 30 N to 300 N
(when Piston Rod Extended up to 333 N)

End Fitting

Standard Dimensions


End Fitting

B8

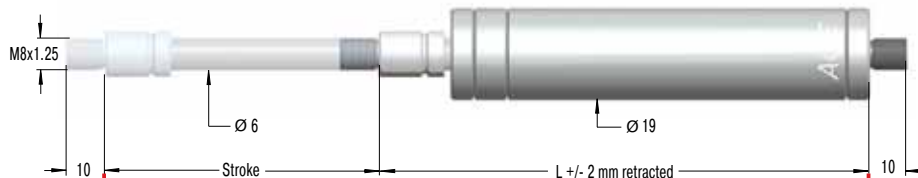


Stud Thread **B8**

A8-VA




Eye A8-VA
max. force 1560 N

C8-VA




Angle Ball Joint C8-VA
max. force 1140 N

D8-VA




Clevis Fork D8-VA
max. force 1560 N

E8-VA



Swivel Eye E8-VA
max. force 1560 N

G8-VA



Ball Socket G8-VA
max. force 1140 N

Dimensions

Type	Stroke mm	L retracted
GZ-19-30-VA	30	130
GZ-19-50-VA	50	150
GZ-19-100-VA	100	200
GZ-19-150-VA	150	250
GZ-19-200-VA	200	300
GZ-19-250-VA	250	350


Ordering Example

Type (Pull Type) _____
Body Ø (19 mm) _____
Stroke (150 mm) _____
Piston Rod End Fitting A8-VA _____
Body End Fitting C8-VA _____
Traction Force F_1 150 N _____
Indicated by K.-No. on delivery _____


GZ-19-150-AC-150-VA

The end fittings are interchangeable and must be positively secured by the customer to prevent unscrewing (i.e. Loctite).
For mounting accessories see page 189.


Rod Shroud W8-19-VA



Adjuster Knob DE-GAS-8
See page 149.



GZ-19-VA

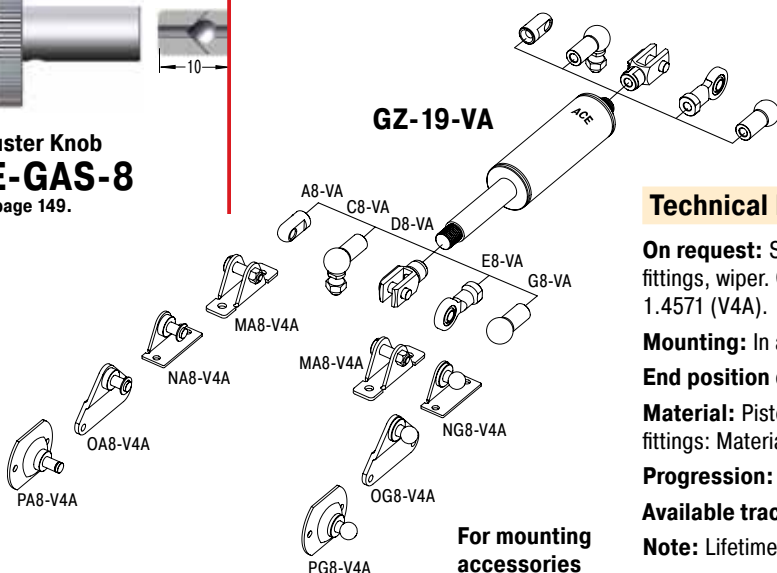

For mounting accessories see page 189.

Technical Data

On request: Special force curves, special lengths, alternative end fittings, wiper. Gas springs and accessories with material 1.4404/1.4571 (V4A).

Mounting: In any position. Install mechanical stop in extended position.

End position damping length: Without damping

Material: Piston rod: Material 1.4401, AISI 316L (V4A). Body and end fittings: Material 1.4301, AISI 304 (V2A).

Progression: Approx. 11%, F_2 max. 333 N

Available traction force range F_1 at 20 °C: 30 N to 300 N

Note: Lifetime approx. 2000 m


Traction (Pull) Forces 150 N to 1200 N
(when Piston Rod Extended up to 1460 N)

End Fitting

Standard Dimensions


End Fitting

B10

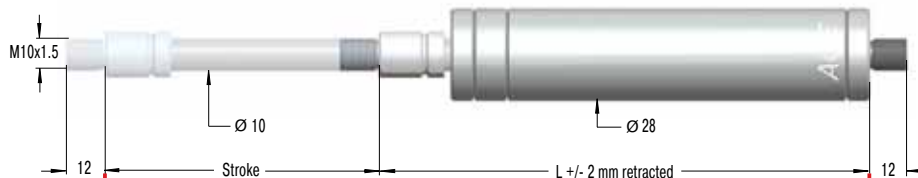


Stud Thread B10

A10-VA




Eye A10-VA
max. force 3800 N

C10-VA




Angle Ball Joint C10-VA
max. force 1750 N

D10-VA



Clevis Fork D10-VA
max. force 3800 N

E10-VA



Swivel Eye E10-VA
max. force 3800 N

Dimensions

Type	Stroke mm	L retracted
GZ-28-50-VA	50	165
GZ-28-100-VA	100	215
GZ-28-150-VA	150	265
GZ-28-200-VA	200	315
GZ-28-250-VA	250	365
GZ-28-300-VA	300	415
GZ-28-350-VA	350	465
GZ-28-400-VA	400	515
GZ-28-450-VA	450	565
GZ-28-500-VA	500	615
GZ-28-550-VA	550	665
GZ-28-600-VA	600	715

Ordering Example


GZ-28-150-EE-800-VA

Type (Pull Type) _____
 Body Ø (28 mm) _____
 Stroke (150 mm) _____
 Piston Rod End Fitting E10-VA _____
 Body End Fitting E10-VA _____
 Traction Force F_1 800 N _____
 Indicated by K.-No. on delivery _____

The end fittings are interchangeable and must be positively secured by the customer to prevent unscrewing (i.e. Loctite).
For mounting accessories see page 189.

Rod Shroud

W10-28-VA




Adjuster Knob

DE-GAS-10

See page 149.

GZ-28-VA

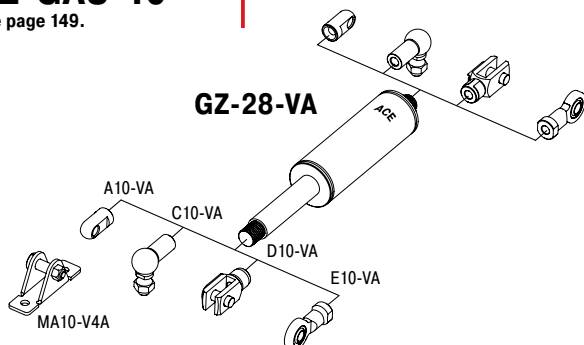

For mounting
accessories
see page 189.

Technical Data

On request: Special force curves, special lengths, alternative end fittings, wiper. Gas springs and accessories with material 1.4404/1.4571 (V4A).

Mounting: In any position. Install mechanical stop in extended position.

End position damping length: Without damping

Material: Piston rod, body and end fittings: Material 1.4301/1.4305, AISI 304/303 (V2A).

Progression: Approx. 22 %, F_2 max. 1460 N

Available traction force range F_1 at 20 °C: 150 N to 1200 N

Note: Lifetime approx. 2000 m

Traction (Pull) Forces 400 N to 5000 N
(when Piston Rod Extended up to 7000 N)

End Fitting

Standard Dimensions


End Fitting

B14




Stud Thread B14

A14-VA




Eye A14-VA
max. force 7000 N

C14-VA




Angle Ball Joint C14-VA
max. force 3200 N

D14-VA



Clevis Fork D14-VA
max. force 7000 N

E14-VA



Swivel Eye E14-VA
max. force 7000 N

Dimensions

Type	Stroke mm	L retracted
GZ-40-100-VA	100	250
GZ-40-150-VA	150	325
GZ-40-200-VA	200	400
GZ-40-250-VA	250	475
GZ-40-300-VA	300	550
GZ-40-400-VA	400	700
GZ-40-500-VA	500	850
GZ-40-600-VA	600	1 000


Ordering Example

Type (Pull Type) _____
Body Ø (40 mm) _____
Stroke (150 mm) _____
Piston Rod End Fitting E14-VA _____
Body End Fitting E14-VA _____
Traction Force F_1 800 N _____
Indicated by K.-No. on delivery _____

GZ-40-150-EE-800-VA

The end fittings are interchangeable and must be positively secured by the customer to prevent unscrewing (i.e. Loctite).
For mounting accessories see page 190.

Rod Shroud W14-40-VA



Adjuster Knob DE-GAS-14
See page 149.

Technical Data

On request: Increased traction force, special force curves, special lengths, alternative end fittings, wiper. Gas springs and accessories with material 1.4404/1.4571 (V4A).

Mounting: In any position. Install mechanical stop in extended position.

End position damping length: Without damping


Material: Piston rod, body and end fittings: Material 1.4301/1.4305, AISI 304/303 (V2A).

Progression: Approx. 40 %, F_2 max. 7000 N

Available traction force range F_1 at 20 °C: 400 N to 5000 N

Note: Lifetime approx. 2000 m

GZ-40-VA

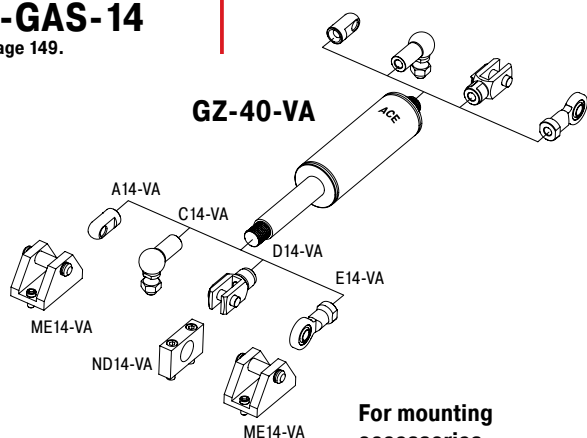

For mounting accessories see page 190.